



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/31/14	B	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

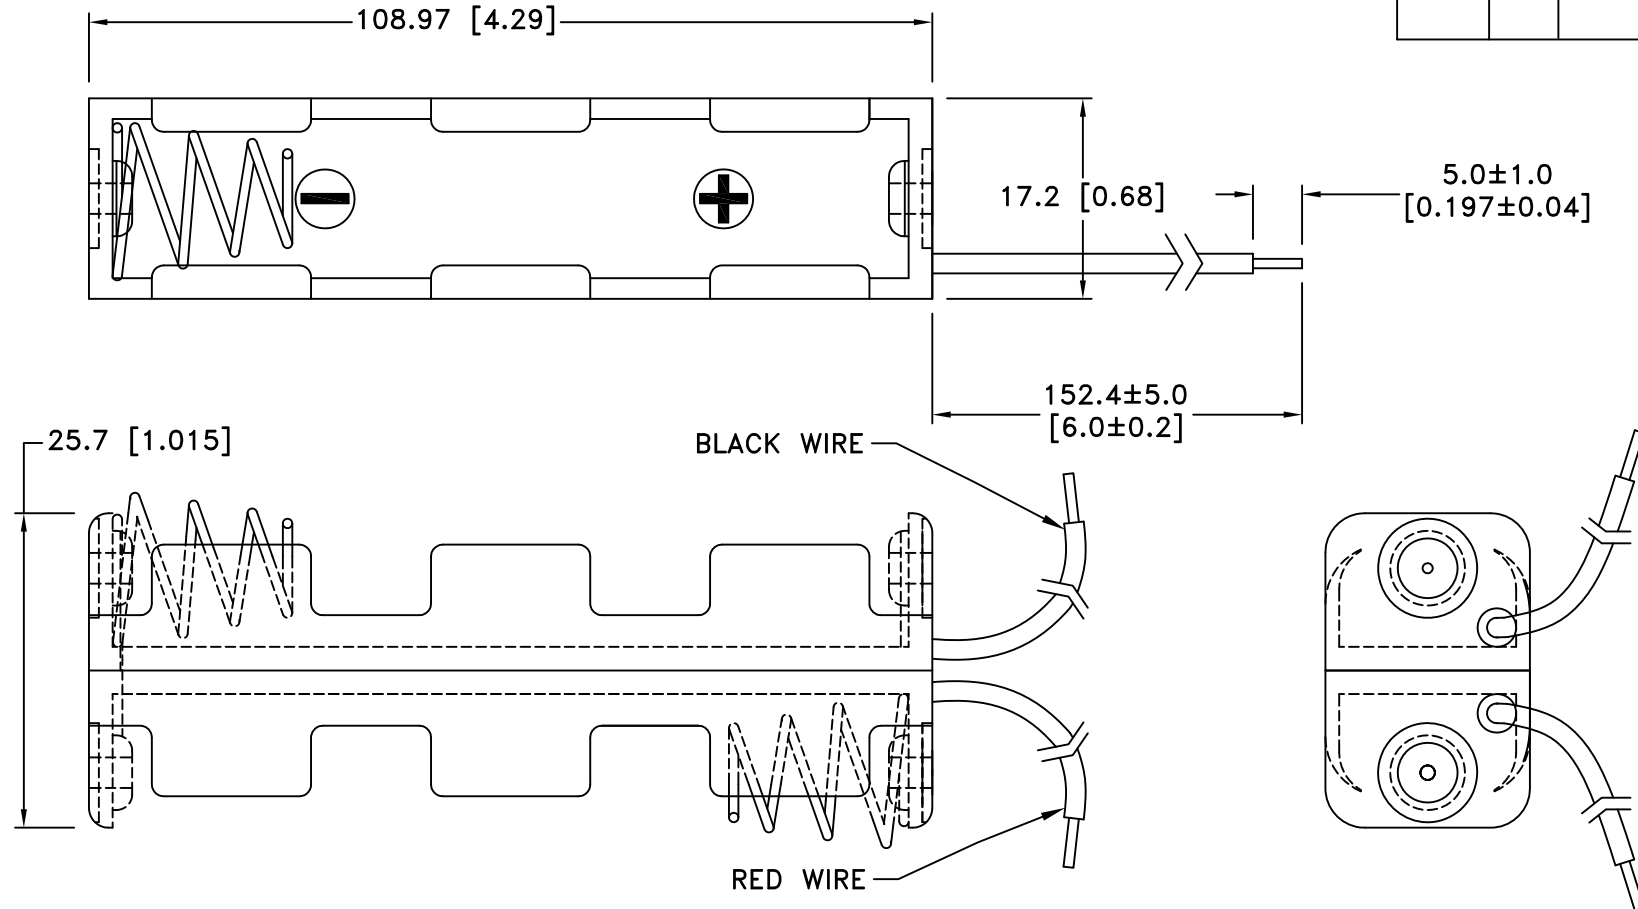

NOTES:

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Rivets - Brass, Nickel Plated
 Wires: 26AWG, UL1007, CSA-TR-64, 300V, 80°C
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	<div>Memory Protection Devices, Inc</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div>		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)			Approved By T.B.
Angular ± 3°	Title FOUR "AA" CELL HOLDER WITH WIRE LEADS		
	Date 10/31/14	Drawing Number BH14AAW	